



40
YEAR
warranty

ROOF TILE

**KLASIK
PLUS**

WE BUILD TRUST

 **nexe**

KLASIK PLUS tile falls into a category of extruded tiles for roofing. The deep double folds enable outstanding sealing of the roof surface. The most important advantage in the application of KLASIK PLUS tiles as compared to other similar clay tiles is its structural concept that **enables sliding leveling of the roof within the range of 30,0 cm to 35,0 cm**. This type of installation of KLASIK PLUS roof tiles eliminates errors caused during the installation of a roof structure, and such tile structure makes possible to easily replace the old tile in an existing roof plane.

Natural



Engobed

The engobing procedure creates a tile of different colors and a smooth and glossy surface which improves the aesthetic appearance of the roof for a long time as the tile corrosion process is slowed down. Engobing is carried out by a controlled process of applying engobe suspension on a dry tile surface. After drying of the engobe suspension applied on the NEXE tile's surface, a firm inseparable whole of the engobe and tile is formed in the process of baking.

Grooved tiles Glinex Klasik



The average weight 3,2 – 3,4 kg
Use per m² 2,65 db.


Special tiles



Tiles KLASIK PLUS

Tested according to standard SRPS EN 1304

Tile weight	2,9 – 3,1 kg
Dimensions of a single tile	cca 415 mm x 260 mm
Maximum covering length	cca 355 mm
Covering width	cca 220 mm
Recommended lath spacing	cca 30,0 cm – 35,0 cm
Roof pitch minimum degree	22°
Use per 1m ²	12,8 – 15,0 units
Package	320 pieces per pallet (Packaging weight approx. 1000kg)
Dimensions of package	1133 mm x 850 mm

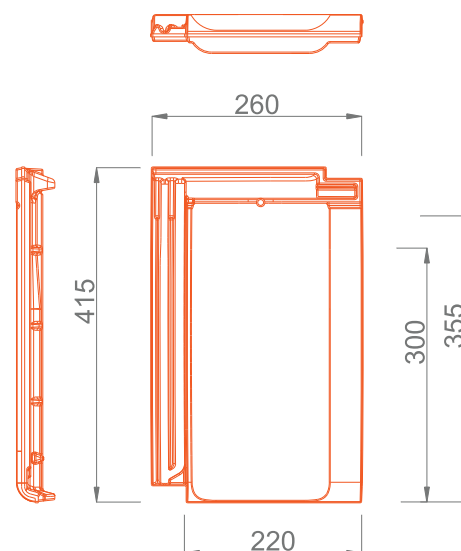

CONTACT

AD POLET IGK
23272 Novi Bečej, Železnička 13, Serbia
Tel: +381 (0)23 771 970, +381 (0)23 771 971
Fax: +381 (0)23 773 300
polet@nexe.rs, www.polet.rs

