


	IDEAL PLUS	KLASIK PLUS	GLINEX TREND
Levi krajnik			
Desni krajnik			
Zračnik			
Snegolov			



IDEAL PLUS



KLASIK PLUS



GLINEX TREND

40
LET
garancije



STREŠNIK

IDEAL PLUS
KLASIK PLUS
GLINEX TREND

Slemenjak



GLINEX
KLASIK

KONTAKT

AD POLET IGK
23272 Novi Bečej, Železnička 13, Republika Srbija
Tel: +381 (0)23 771 970, +381 (0)23 771 971
Fax: +381 (0)23 773 300
polet@nexe.rs, www.polet.rs

GRADIMO ZAUPANJE

nexe
STREŠNIK



STREŠNIK

IDEAL PLUS

Testiran po standardu SRPS EN 1304

Teža strešnika	2,85 – 2,95 kg
Posamična dimenzija	cca 420 mm x 263 mm
Maksimalna dolžina pokrivanja	cca 360 mm
Širina pokrivanja	cca 220 mm
Priporočeni razmik letev	cca 33,2 cm – 35,5 cm
Minimalna stopnja nagiba strehe	22°
Poraba na 1m ² strehe	12,5 – 13,7 kos
Pakiranje	320 kosov na paleti (teža pakiranja cca 1000kg)
Dimenzija pakiranja	1133 mm x 850 mm




STREŠNIK

KLASIK PLUS

Testiran po standardu SRPS EN 1304

Teža strešnika	2,9 – 3,1 kg
Posamična dimenzija	cca 415 mm x 260 mm
Maksimalna dolžina pokrivanja	cca 355 mm
Širina pokrivanja	cca 220 mm
Priporočeni razmik letev	cca 30,0 cm – 35,0 cm
Minimalna stopnja nagiba strehe	22°
Poraba na 1m ² strehe	12,8 – 15,0 kos
Pakiranje	320 kosov na paleti (teža pakiranja cca 1000kg)
Dimenzija pakiranja	1133 mm x 850 mm

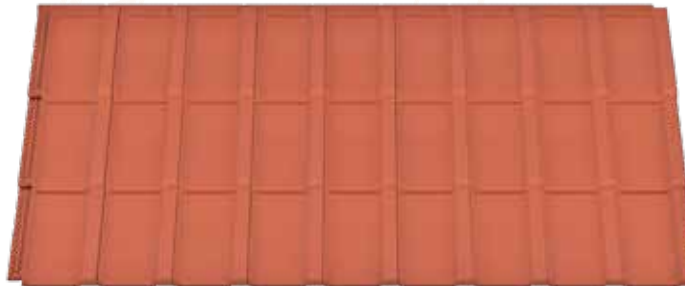

STREŠNIK

GLINEX TREND

Testiran po standardu SRPS EN 1304

Teža strešnika	2,8 – 3,0 kg
Posamična dimenzija	cca 415 mm x 260 mm
Maksimalna dolžina pokrivanja	cca 360 mm
Širina pokrivanja	cca 220 mm
Priporočeni razmik letev	cca 31,5 cm – 35,5 cm
Minimalna stopnja nagiba strehe	22°
Poraba na 1m ² strehe	12,5 – 14,7 kos
Pakiranje	320 kosov na paleti (teža pakiranja cca 900kg)
Dimenzija pakiranja	1133 mm x 850 mm

