













	IDEAL PLUS	KLASIK PLUS	GLINEX TREND
leva završnica			
desna završnica			
ventilacioni crep			
snegobran			



IDEAL PLUS




KLASIK PLUS



GLINEX TREND

**40**  
GODINA  
garancije

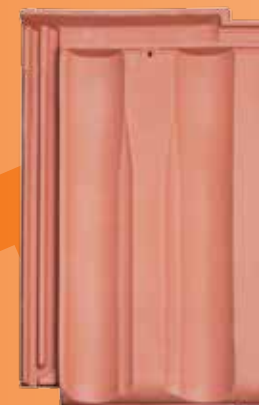

CREP

IDEAL PLUS  
KLASIK PLUS  
GLINEX TREND

žlebnjak

GLINEX  
KLASIK



**KONTAKT**

AD POLET IGK  
23272 Novi Bečej, Železnička 13, Republika Srbija  
Tel: +381 (0)23 771 970, +381 (0)23 771 971  
Fax: +381 (0)23 773 300  
polet@nexe.rs, www.polet.rs

GRADIMO POVERENJE

**nexe**  
CREP



## CREP | IDEAL PLUS

Ispitan po standardu SRPS EN 1304


Masa crepa	2,85 – 2,95 kg
Pojedinačna dimenzija	cca 420 mm x 263 mm
Maksimalna pokrivna dužina	cca 360 mm
Pokrivna širina	cca 220 mm
Preporučeni razmak letava	cca 33,2 cm – 35,5 cm
Minimalni stepen nagiba krova	22°
Utrošak na 1m <sup>2</sup> krova	12,5 – 13,7 kom
Pakovanje	320 komada na paleti (težina pakovanja cca 1000kg)
Dimenzije pakovanja	1133 mm x 850 mm



## CREP | KLASIK PLUS

Ispitan po standardu SRPS EN 1304

Masa crepa	2,9 – 3,1 kg
Pojedinačna dimenzija	cca 415 mm x 260 mm
Maksimalna pokrivna dužina	cca 355 mm
Pokrivna širina	cca 220 mm
Preporučeni razmak letava	cca 30,0 cm – 35,0 cm
Minimalni stepen nagiba krova	22°
Utrošak na 1m <sup>2</sup> krova	12,8 – 15,0 kom
Pakovanje	320 komada na paleti (težina pakovanja cca 1000kg)
Dimenzije pakovanja	1133 mm x 850 mm

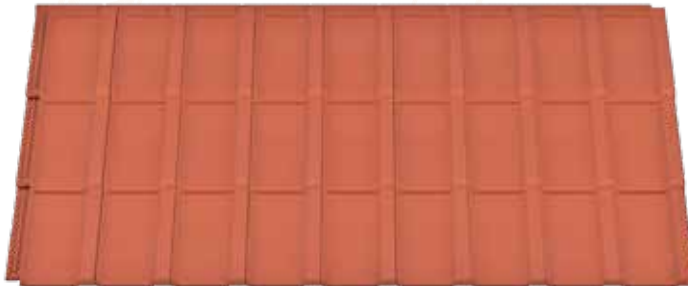

## CREP | GLINEX TREND

Ispitan po standardu SRPS EN 1304

Masa crepa	2,8 – 3,0 kg
Pojedinačna dimenzija	cca 415 mm x 260 mm
Maksimalna pokrivna dužina	cca 360 mm
Pokrivna širina	cca 220 mm
Preporučeni razmak letava	cca 31,5 cm – 35,5 cm
Minimalni stepen nagiba krova	22°
Utrošak na 1m <sup>2</sup> krova	12,5 – 14,7 kom
Pakovanje	320 komada na paleti (težina pakovanja cca 900kg)
Dimenzije pakovanja	1133 mm x 850 mm

