



ROOF TILE

**IDEAL**

**WE BUILD TRUST**

**nexe**

**IDEAL** are the clay roof tiles manufactured in line with a modern baking technology using "U" shape trays and baked at a temperature of 1040 °C. IDEAL is characterized by excellent functionality, accurate dimensions, double fold roof tiles. Molding by the plaster molds gives this tile striking appearance and well-built relief, particularly the grooves, which enables an excellent installation on the roof and sealing of the roof plane.

Natural



Engobed



Special tiles



Grooved tiles Ideal




The average weight 3,5 – 4,0 kg  
Use per m<sup>1</sup> - 2.65 units

**IDEAL tiles**

Tested according to standard SRPS EN 1304

Tile weight	2,9 – 3,1 kg
Dimensions of a single tile	cca 415 mm x 260 mm
Cover dimensions	cca 340 mm x 200 mm
Recommended lath spacing	cca 34 cm
Roof pitch minimum degree	22°
Use per 1m <sup>2</sup> of roof	14,7 units
Package	320 pieces per pallet (Packaging weight approx. 1000kg)
Dimensions of package	1133 mm x 850 mm

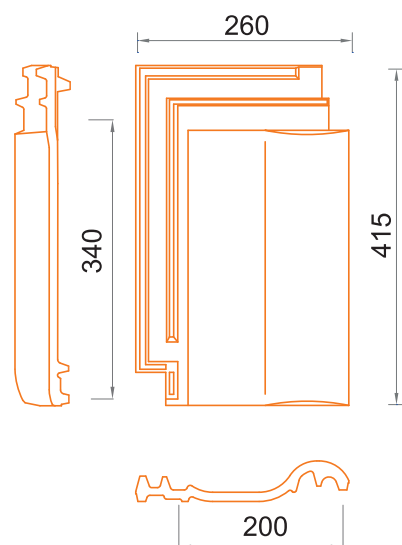

**CONTACT**

AD POLET IGK  
23272 Novi Bečej, Železnička 13, Serbia  
Tel: +381 (0)23 771 970, +381 (0)23 771 971  
Fax: +381 (0)23 773 300  
polet@nexe.rs, www.polet.rs

